



Commercial Blower Coil Air Handler

Model BDVA075-180
6,000-20,000 CFM (2.83-9.44 m³/s)
238-842 MBH (70-247 kW)





Presenting the BD Series compact air handlers...

A system engineered with your costs in mind, the BD Series of compact air handlers offer:-

1 Easy and versatile installation	<ul style="list-style-type: none"> • Small footprint to save space. • Fully factory packaged to quicken installation (filters, drives, motors)
2 Built to last	<ul style="list-style-type: none"> • Attractive, high gloss durable finish on baked polyester powder painted GI panels removes corrosion concerns.
3 Wide capacity range	<ul style="list-style-type: none"> • Meets most application needs with a CFM range of 6,000-20,000 CFM covering 5 modules.
4 Flexible fan arrangement	<ul style="list-style-type: none"> • BDVAs offer added flexibility of fan arrangement for horizontal or vertical discharge. • Flush mounted to walls save expensive floorspace.

UNIT CASING

The unit framework shall be GI steel. Exterior panels shall be fabricated from galvanized steel. All panels shall be cleaned and coated with a baked polyester powder paint. The base frame shall be welded galvanized steel.

All panels in contact with air stream shall be insulated with Polyethylene foam. All panels shall be removable to ensure proper access for servicing and maintenance. Removable panels shall be secured with bolts.

FOOTPRINT

To save building space all models shall be placed against wall with return air from the front and general service from the sides.

COOLING COIL

The cooling coil shall be 9.5 mm (3/8") OD (Except for BDVA150&180 cooling coil shall be 12.7 mm (1/2") OD) internally grooved, seamless copper tubes mechanically expanded into aluminium corrugated fins for BDVA

Coils shall be leak tested at 380 psig. The drain pan shall be fabricated of galvanized steel, insulated to prevent any condensation, and baked polyester powder paint to prevent corrosion.

FILTER

1 inch or 2 inch washable filters shall be provided with side loading filter for ducted return.

FAN

Supply fans shall be of double width double inlet forward curved centrifugal fans statically and dynamically balanced. The drive components shall include fixed pitch drives and multiple V-belts. The drives shall be factory run tested and balanced. The supply fan motor shall be totally enclosed fan cooled. Fan and motor bearings shall be permanently lubricated.

OPTIONAL ACCESSORIES:

STARTERS

Unit mounted DOL fan motor starters are available as an optional feature.

HI-STATIC MOTOR

Optional factory mounted oversized fan motor for high external static pressure application.

RETURNS AIR GRILLES

Return air grilles shall be provided for vertical or horizontal discharge, horizontal return application. Grilles shall be installed in place of the front lower side panels.

STAINLESS STEEL DRAIN PAN


Stainless steel drain pan shall be available as an optional feature for BDVA.

FOR BDVA 075 AND 090 ONLY


DISCHARGE PLENUM AND GRILLES

Discharge plenum shall be available for vertical free-blow discharge applications. It shall be constructed of galvanized steel, finished with baked polyester powder paint to match the unit casing. Grilles shall be satin finished aluminium and have double-deflection adjustable louvers.


BDVA-Flexible Fan Arrangement




Arrangement 1




Arrangement 2



Arrangement 3



Arrangement 4

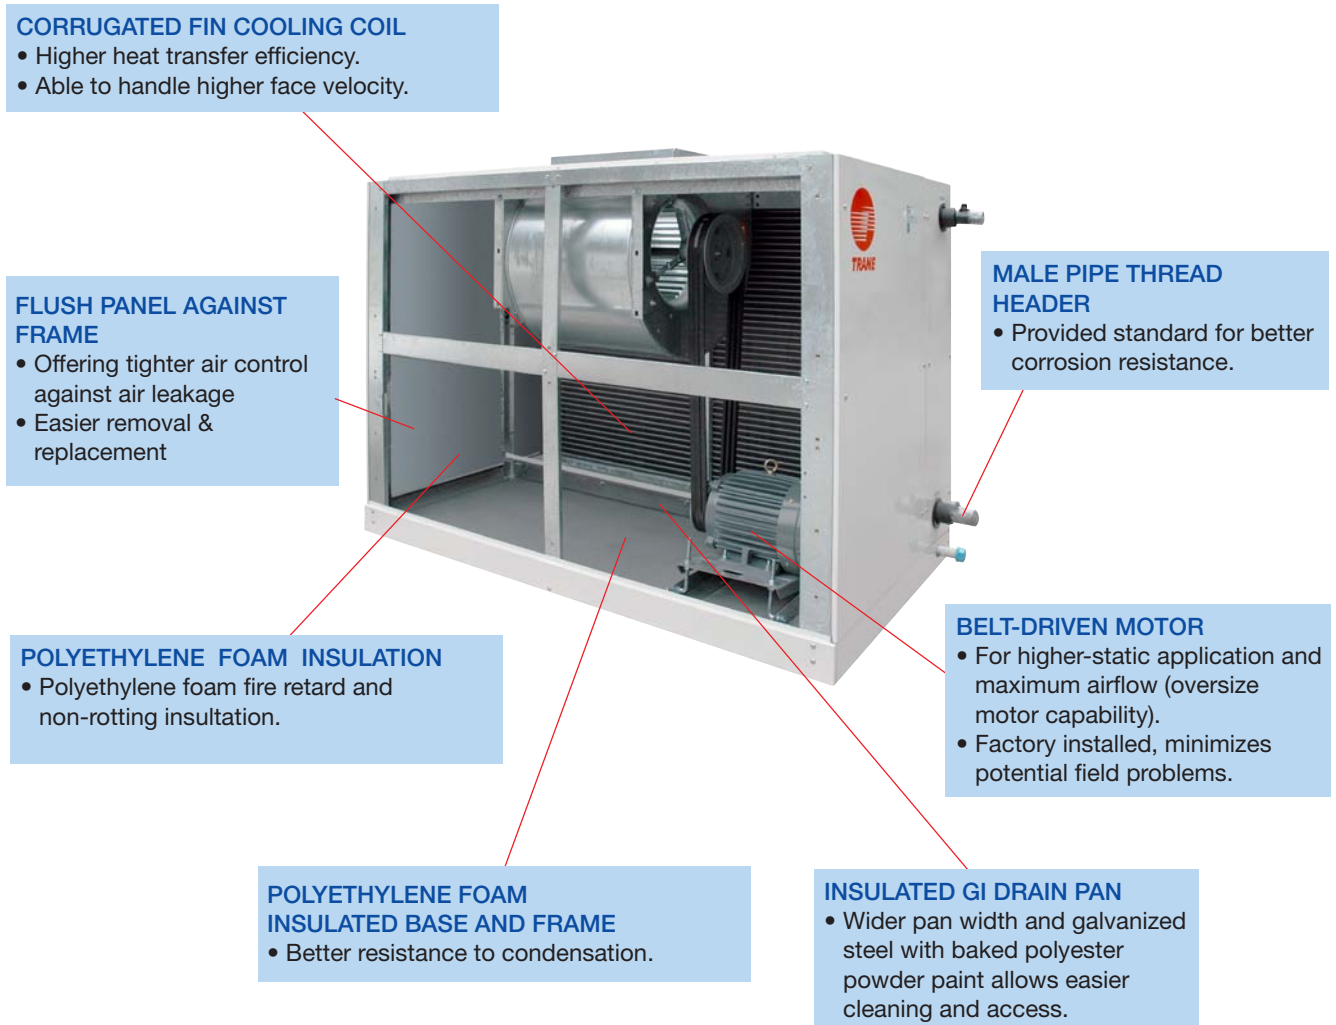

STANDARD & FEATURES

FEATURES	BENEFITS
<ul style="list-style-type: none"> • Compact Air Handler 	<ul style="list-style-type: none"> • Small equipment room space requirements. • Greater flexibility in positioning the unit. • More usable (rental/leasing) space.
<ul style="list-style-type: none"> • Corrugated Fin Cooling Coil • Blue Fin Cooling Coil (Optional in BDVA) 	<ul style="list-style-type: none"> • Higher heat transfer efficiency. • To further enhance protection against moisture carry-over and corrosion.
<ul style="list-style-type: none"> • Broad filter selection 	<ul style="list-style-type: none"> • BDVA 075-180 provide 1 inch or 2 inch with side loading filter for ducted return. • Broad filter selection for application flexibility and improved indoor air quality.
<ul style="list-style-type: none"> • Powder paint in attractive color Baked polyester powder paint is applied on treated galvanized steel. 	<ul style="list-style-type: none"> • Uniform coverage-no liquid runs. • Highly corrosion resistant gloss finish.
<ul style="list-style-type: none"> • Optional Hi-static motors and drives from factory 	<ul style="list-style-type: none"> • Eliminates need for field modification. • Assures proper airflow. • Increased application flexibility.
<ul style="list-style-type: none"> • High CFM/Ton • Permanently lubricated ball bearings 	<ul style="list-style-type: none"> • Better comfort, better air quality. • Longer lasting. • No maintenance.

Specification

Models	Indoor unit		BDVA075	BDVA090	BDVA120	BDVA150	BDVA180	
Electrical Data	Power Supply	V/ph/Hz	380-415/3/50					
Performance Data	Nominal Airflow	cfm	7,760	9,240	12,120	15,130	18,080	
	Standard Cooling Capacity	MBH	238	280	380	570	660	
Cooling Coil								
Standard Coil	Row		3	3	3	4	4	
	Water Flow Rate		47.5	56.0	76.0	113.8	131.9	
	Water Pressure Drop		9.3	9.1	15.8	8.1	8.9	
Optional Coil	Cooling Capacity		326	394	523	720	842	
	Row		6	6	6	6	6	
	Water Flow Rate		65.1	78.7	104.3	143.7	167.9	
Common Data	Water Pressure Drop		5.4	9.4	9.3	18.2	20.5	
	Fin Per Inch		12	12	12	12	12	
	Tube & Header Material		Copper					
Fan & Motor	Header Tube Diameter (OD)	in	1-5/8	1-5/8	1-5/8	2-1/8	2-1/8	
	Tube Size (OD)	in	3/8	3/8	3/8	1/2	1/2	
	Drain Connection Size	in	1	1	1	1	1	
	Type		Centrifugal FC					
Fan	Fixed Drive Type		Belt and Pulley					
	Number Used		1	1	2	2	2	
	Maximum Airflow	cfm	8,900	10,600	13,800	18,310	21,800	
	Minimum Airflow	cfm	5,900	7,000	9,100	12,060	14,400	
	Type		TEFC					
	Number Used		1	1	1	1	1	
Motor	Motor HP	STD	5.0	7.5	7.5	10.0	15.0	
		Hi Static	7.5/10.0	10.0/15.0	10.0/15.0	15.0/20.0	20.0	
	Number of Speed		1	1	1	1	1	
RLA/LRA	A	8.0/63.0	12.0/79.0	12.0/79.0	15.2/110.0	22.0/153.0		
Unit Dimensions and Weight								
Dimensions	Crated (H x W x D)	mm	1,500x2,100x1,290	1,650x2,100x1,290	1,780x2,390x1,290	1,900x2,900x1,520	1,980x2,900x1,520	
	Uncrated - Net (H x W x D)	mm	1,219x1,808x1,040	1,372x1,808x1,040	1,520x2,088x1,040	1,653x2,596x1,275	1,777x2,596x1,275	
	Crated	kg	402	470	543	768	832	
Weight	Uncrated - Net	kg	353	421	487	685	749	

Note : 1. Cooling capacity is rated at 80 FDB/67 FWB at nominal airflow listed, entering water temperature at 45 °F and water temperature rise of 10 °F

2. Product design and specification are subject to change without notice.



Trane optimizes the performance of home and buildings around the world. A business of Ingersoll Rand, the leader in creating and sustaining safe, comfortable, and energy efficient environments, Trane offers a broad portfolio of advance controls and HVAC systems, comprehensive building services, and parts. For more information, visit www.tranethailand.com

ทราน (ประเทศไทย)

เลขที่ 1126/2 ชั้น 30-31 อาคารวานิช 2 ถนนสุขุมวิทใหม่ แขวงมักกะสัน เขตราชเทวี กรุงเทพฯ 10400

โทร. 0-2704-9999

©2010 Trane All rights reserved
BDVA-SLB001-E4 December 24, 2010

